

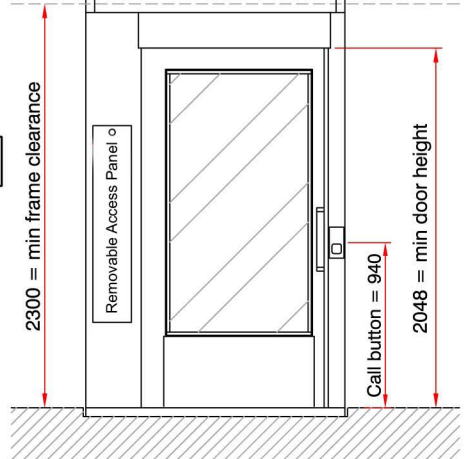



MAXIMUM STOPS BETWEEN FLOORS = 6

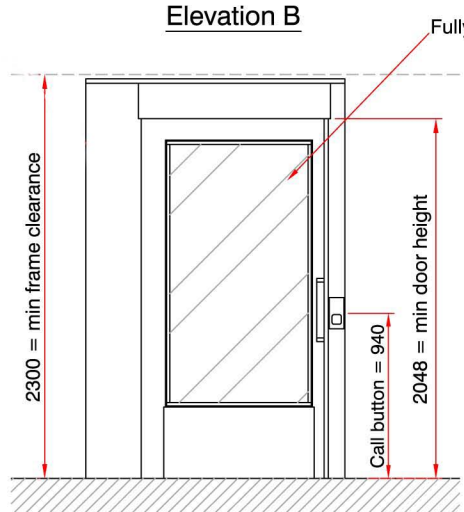

**NOTE**  
If a pit cannot be achieved a 50mm ramp can be provided

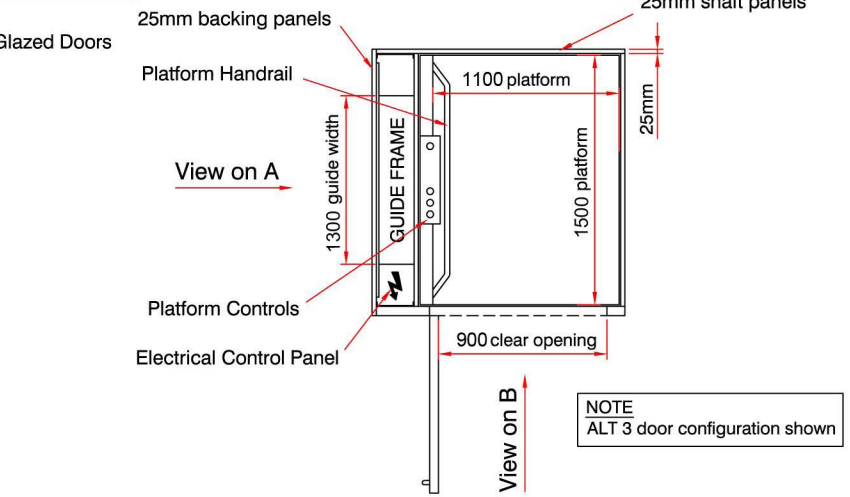

**NOTE**  
ALT 3 door configuration shown

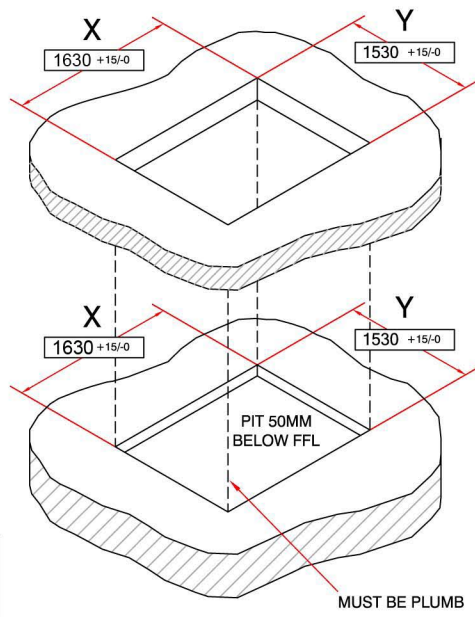


**Vertical Lift Platform Specification**

- Load: 400kg/500kg 5 persons
- Drive: Direct driven screw and nut
- Speed: 0.15m / sec
- Travel: Maximum travel up to 13m
- Stops: Max 6 stops
- Motor: 2.2kw
- Power: 415v 3ph 50Hz 10A (1ph optional)
- Colour: RAL 9016 as standard (alternative RAL colours available)
- Panels: 12mm thick double skin panels
- Panel Infill: Polystyrene Infill

**Builders work Required**

- 1 - Provide a trimmed pit / shaft aperture to the dimensions shown, pit must be smooth level and structurally sound
- 2 - Provide a power supply complete with a lockable isolator
- 3 - Provide secure thresholds for door fixing

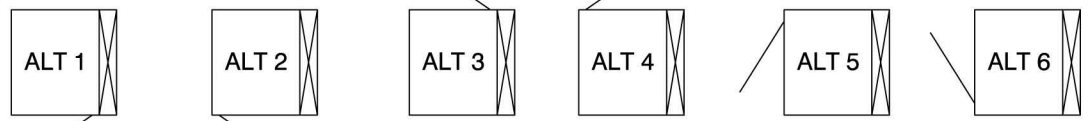

**Door Configurations Available**  
(Guides can go on any side)

**Premier Platform Lifts**  
www.lifts.ie  
Premier Platform Lifts  
County, Mountshannon, Co. Clare, Ireland  
Tel: +353 (0)61 922 903  
Fax: +353 (0)61 922 904  
Email: info@lifts.ie  
Web: www.lifts.ie

TITLE <b>A400 Vertical Platform Lift - 400kg/500kg</b>		REV <b>A</b>
DWG NO.	-----	
SCALE <b>NTS</b>	DATE 09/12/10	DRAWN <b>RH</b>