


**LIFT STD SPECIFICATION**

Load capacity	350kg
Drive system	Hydraulic 2:1 roped
Speed	0.15 m/s
Maximum number of stops	5
Maximum Travel	9.25m
Pit depth	120mm
Headroom	2600mm
Power	230V-mono AC – 50Hz
Motor	1.8 kW
Cabin COP	Full height Vertical
Car Controls	One Touch
Landing Controls	One Touch
Cabin Ceiling	LED bar
Cabin Finish	Skin-plate
Door Type	Telescopic
Door Finish	RAL 7040
Communication	Telephone

Structure Shaft by others  
 Structure Finish Built to withstand the loadings issued on job specific drawing.

**Options**

- LCD Display
- Voice Announcement
- Cabin Mirror
- Handrail
- Auto-dialer
- Numerous Cabin Finishes
- Stainless Steel Cabin/Landing doors
- 120min Fire rated doors

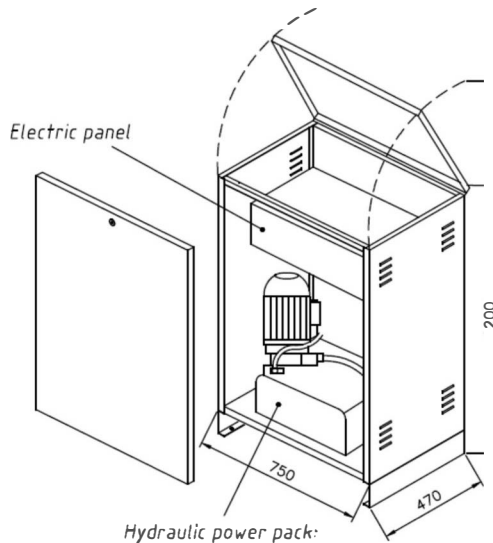

Hydraulic Cabinet, to be sited within 12 metres of the lift shaft. A 100mm conduit run for cables & hoses needs to be provided.



Premier Lifts, Glean Glas House,  
 Tuamgraney, Co. Clare, Ireland.  
 Tel: 061 922 903 Email: info@lifts.ie  
 Fax: 061 922 904 Web: www.lifts.ie

VPL500 – Shaft by others -1460mm x 1170mm Single Entry/Exit – Telescopic doors		
DWG NO - 0013		REV - A
SCALE NTS	DATE 14/11/2017	DRAWN APG